

With **Aura**, Professionals can now **Re-imagine** their **Workspaces** at **Home**



Ceiling Microphone



Easily installed and affordable, featuring three wide-range microphones mounted together into a single unit array. Provides the rich sound of three individual unidirectional microphones while maintaining full 360-degree coverage.

Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any **cloud-based video collaboration** application for your **professional home office**




Highlights

- † Easily installed and affordable popular tri-element ceiling microphone array. Gets microphones off the table, while maintaining speech quality and intelligibility.
- † Enhances any conferencing application which demands high-quality audio, delivering exceptional audio quality.
- † Provides rich sound with three wide-range mics mounted together into a single-unit array, maintaining 360-degree coverage from 15 to up to 20 ft.
- † Superb audio quality with wide bandwidth, high SNR, and 100% shielding against RF interference allows use for multiple applications.
- † Perfect match for the CONVERGE® Huddle DSP.
- † Includes drop down cables for 12" and 24" to match various ceiling heights.
- † Sleek, unobtrusive design (3.3" x 1.5") comes in White or Black color options.
- † FREE COLLABORATE® Space lifetime subscription — ClearOne's high quality, award winning cloud-based video collaboration application.

Aura Professional Home Office Application

Complete your **Ceiling Microphone** setup by adding other ClearOne Aura products

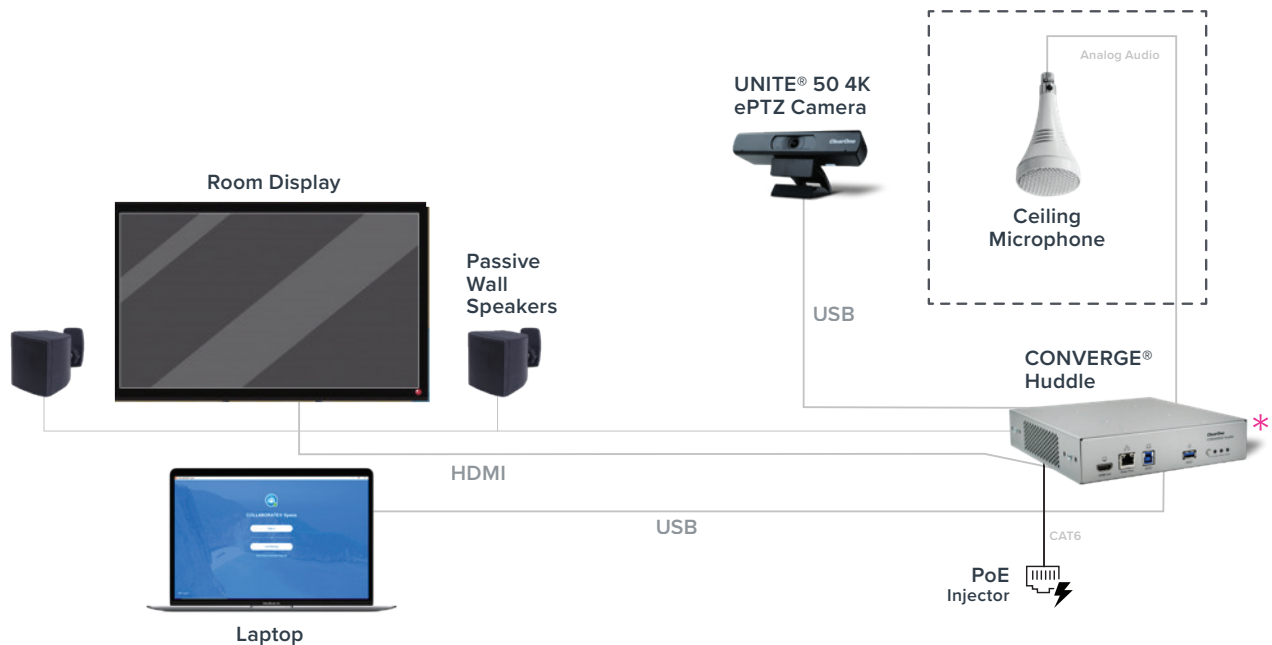

* Small enough to easily mount behind the room display

Specifications

+ 910-001-013-W White Ceiling Microphone Array kit

INCLUDES

- + Each kit includes:
 - Microphone Array Module
 - 12 and 24 inch drop-down cables
 - 25 foot RJ45 plenum-rated CAT5e cable
 - RJ45 receptacle to mixer adapter cable
 - Free COLLABORATE® Space lifetime subscription

ACOUSTIC CHARACTERISTICS

- + Polar Pattern: Cardioid
- + Dynamic Range: 80 dB, 1 kHz @ max SPL
- + Signal/Noise Ratio: 60 dBA, 1 kHz @ 1 Pa
- + Frequency Response: 100 Hz - 12 kHz
- + Sensitivity: 114 mV/Pa

ELECTRICAL CHARACTERISTICS

- + Element: Fixed-charge back plate permanently polarized condenser
- + Phantom Power Requirement: 12-52 vdc, 2 mA
- typical Impedance: 200 Ω

CABLES INCLUDED

- + 12-inch and 24-inch 4-pin mini-XLR drop-down cable
- + 25-foot RJ45 male to RJ45 male CAT5e
- + RJ45 receptacle to mixer adapter cable

MOUNTING

- + Ceiling pass-through mounting assembly
- + Max cable length from array to Huddle: 300 ft (91.44 m)

ENVIRONMENTAL

- + -4° F to 158° F (-20° C to 70° C)

MECHANICAL

- + Dimensions (W x D xH): 3.3 x 1.5" (83.8 x 38.1 mm)
- + Weight: 2.2 lb (1 kg)

Sales & Inquiries

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

Headquarters

US: +1.801.975.7200
International: +1.801.975.7200

Aura Sales

US: +1.888.HEY.AURA
International: +1.801.975.7200
aurasales@clearone.com

Aura Tech Support

US: +1.888.HEY.AURA
International: +1.801.975.7200
auratechsupport@clearone.com